


Self-Locking Nylon Cable Ties


Material: Nylon 66, 94V-2 certificated by UL, heat-resisting, erosion control, insulate well and not apt to age.

Color: Natural (or white, standard color), black and other colors are available as requested.

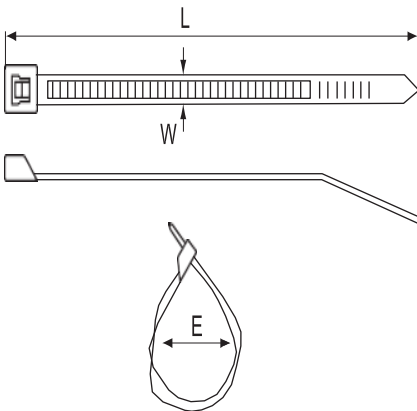


Item No	L		W(mm)	(mm) Max. bundle dia.	Min tensile strength		Packing
	Inch	mm			Ibs	kgs	
3×60	23/8"	60	2.5	11	18	8	100PCS & 1000PCS
3×80	33/16"	80	2.5	16	18	8	
3×100	4"	100	2.5	22	18	8	
3×120	43/4"	120	2.5	30	18	8	
3×150	6"	150	2.5	35	18	8	
3×160	6 1/4"	160	2.5	40	18	8	
3×200	8"	200	2.5	50	18	8	
4×100	4"	100	3.5	22	40	18	100PCS & 500PCS
4×120	4 3/4"	120	3.5	30	40	18	
4×150	6"	150	3.5	35	40	18	
4×180	7"	180	3.5	42	40	18	
4×200	8"	200	3.5	50	40	18	
4×250	10"	250	3.5	65	40	18	
4×300	11 5/8"	300	3.5	80	40	18	
4×370	14 1/2"	370	3.5	102	40	18	
5×100	4"	100	4.8	22	50	22	100PCS & 250PCS
5×120	4 3/4"	120	4.8	30	50	22	
5×150	6"	150	4.8	35	50	22	
5×180	7"	180	4.8	42	50	22	
5×200	8"	200	4.8	50	50	22	
5×250	10"	250	4.8	65	50	22	
5×300	11 5/8"	300	4.8	82	50	22	
5×350	13 3/4"	350	4.8	90	50	22	
5×380	15"	380	4.8	102	50	22	
5×400	15 3/4"	400	4.8	105	50	22	
5×430	17 3/4"	430	4.8	120	50	22	
5×450	17.7"	450	4.8	125	50	22	
5×500	19 11/16"	500	4.8	150	50	22	
5×530	20"	530	4.8	155	50	22	
8×150	6"	150	7	35	120	55	100PCS & 250PCS
8×180	7"	180	7	42	120	55	
8×200	8"	200	7	50	120	55	
8×250	10"	250	7	65	120	55	
8×300	11 5/8"	300	7	82	120	55	
8×350	13 3/4"	350	7	90	120	55	
8×370	14 1/2"	370	7.6	102	120	55	
8×400	15 3/4"	400	7	105	120	55	
8×450	17 3/4"	450	7	118	120	55	
8×500	19 11/16"	500	7	150	120	55	
8×550	21 4/5"	550	7	165	120	55	
10×400	15 3/4"	400	8.8	105	175	80	100PCS
10×450	17 3/4"	450	8.8	130	175	80	
10×500	19 11/16"	500	8.8	150	175	80	
10×550	21 11/16"	550	8.8	165	175	80	
10×650	25 9/16"	650	8.8	190	175	80	
10×760	29 1/2"	760	8.8	220	175	80	
10×800	31 1/2"	800	8.8	230	175	80	
10×900	36 1/4"	900	8.8	265	200	90	
10×1020	40 1/6"	1020	8.8	295	200	90	
10×1200	48"	1200	8.8	345	200	90	
12×650	25 3/5"	650	11	165	250	114	
12×760	35 1/2"	760	11	225	250	114	

Saddle Type Tie Mounts

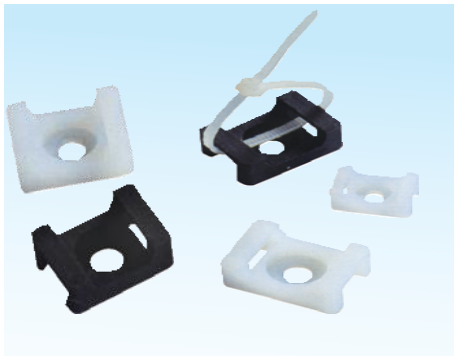

Application: Saddle design provide maximum stability to wire bundles. To apply, simply fix mount with a screw and secure wire bundles with MG nylon cable ties.

Item No	L(mm)	W (mm)	H(mm)	T	B	Packing
MG-0	9	7	5	5	4	1000PCS/Bag
MG-1	15	10	7	7	4	
MG-2	22	15	9	9	5	
MG-2L	22	15	9	9	6	

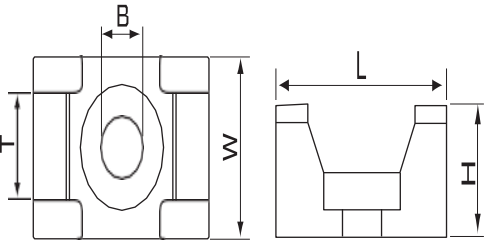


Tie Mounts

Material: UL approved nylon 66, 94V-2, with imported adhesive sticker. Good insulation, long lasting and uneasy to age.

Usage: Remove the cover of the adhesive and stick the piece properly. then put in cable tie for using.

Application: Used where hole-drilling is not allowed. Easy and time-saving.

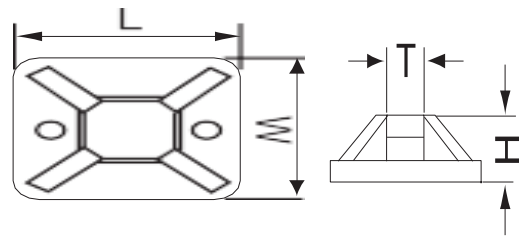

Item No	L×W(mm)	H(mm)	T(mm)	Packing
MG-20	20×20	6.1	5	100PCS & 1000PCS/Bag
MG-25	25×25	7.5	6.2	100PCS & 500PCS/Bag
MG-30	30×30	8.7	6.4	100PCS & 500PCS/Bag
MG-40	40×40	6.4	10.8	100PCS & 250PCS/Bag